


TR-EW25/TR-EB25/TR-EG25

- White
- Black
- Grey

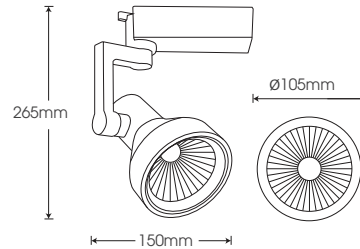


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-EW25/ TR-EB25/ TR-EG25	25W	CREE (USA)	36°	3000K	>80	2310lm
					>90	1885lm
				4000K	>80	2430lm
					>90	2030lm
				5000K	>80	2430lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

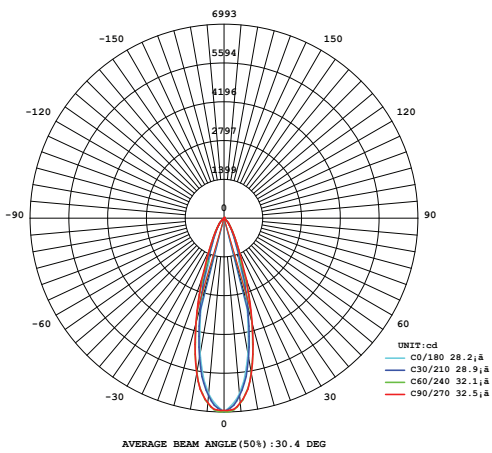

Height	AVR E	CENTER E	Diameter
1.50m	2289.32lx	3101.07lx	75.53cm
2.00m	1287.74lx	1744.35lx	100.71cm
4.00m	321.94lx	436.09lx	201.42cm
6.00m	143.08lx	193.82lx	302.14cm
10.00m	51.51lx	69.77lx	503.56cm

Angle: 28.3deg

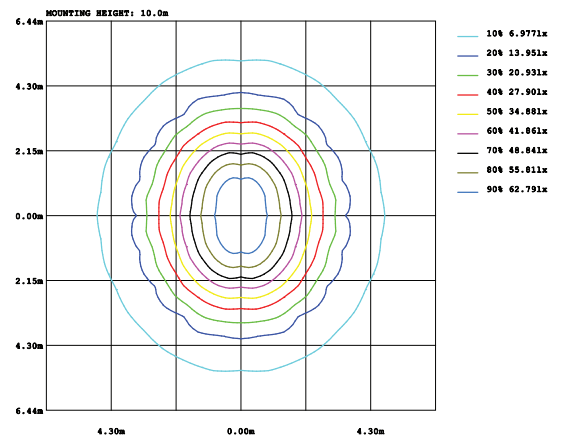

Parameter of TR-EW25/TR-EB25/TR-EG25 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulong
Lid cover the connector box
- Mount the rails on the fixed head

 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs
5 pcs

VinaLED®
Đ dẫn đầu về độ sáng và chất lượng