

TR-GW20/TR-GB20/TR-GG20

2700K 3000K 3500K 4000K 5000K 6500K


>30.000
Hours

220-240
VAC

RoHS

CE

White
Black
Grey




Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-GW20/ TR-GB20/ TR-GG20	20W	CREE (USA)	24°/38°	3000K	>80	1520lm
					>90	1220lm
				4000K	>80	1650lm
					>90	1315lm
				5000K	>80	1650lm
					>90	1650lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

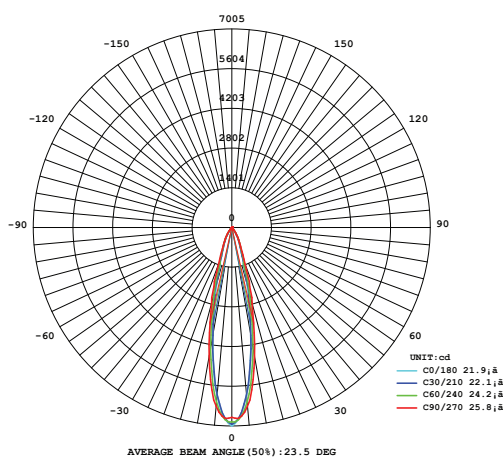

Height	AVR E	CENTER E	Diameter
1.50m	2250.82lx	3113.11lx	58.00cm
2.00m	1266.09lx	1751.13lx	77.33cm
4.00m	316.52lx	437.78lx	154.66cm
4.50m	250.09lx	345.90lx	173.99cm
6.00m	140.68lx	194.57lx	231.99cm

Angle: 21.9deg

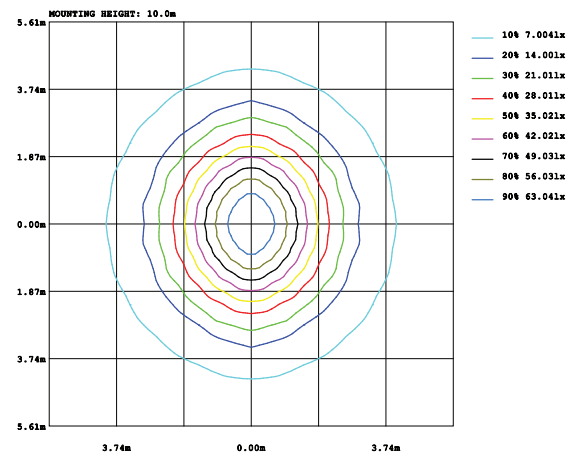

Parameter of TR-GW20/TR-GB20/TR-GG20 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point.

Ceiling / wiring box
Wire connection point
Bulb
Lid cover the connector box
- Mount the rails on the fixed head.

• Always ensure that the rails are parallel to the wall
• Attach the bulg along the rails to firmly fixed
- Put the lamp on the rails.

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs
120mm
290mm
240mm
4 pcs
470mm
370mm
250mm
VinaLED®
Dẫn đầu về độ sáng và chất lượng