

TR-IB15

- White
- Black
- Grey




2700K 3000K 3500K 4000K 5000K 6500K

>30.000
Hours

220-240
VAC

RoHS

CE






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-IB15	15W	CITIZEN (Japan)	26°	3000K	>80	1065lm
					>90	1000lm
				4000K	>80	1230lm
					>90	1160lm
				5000K	>80	1230lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

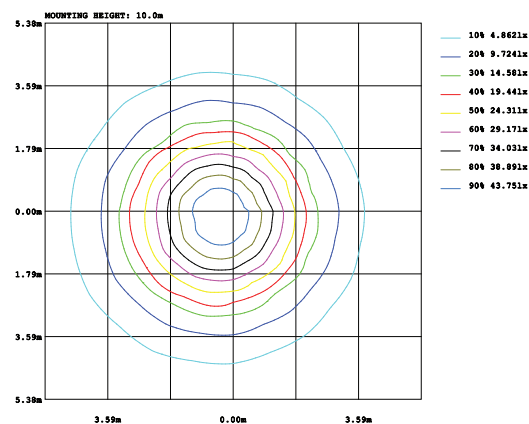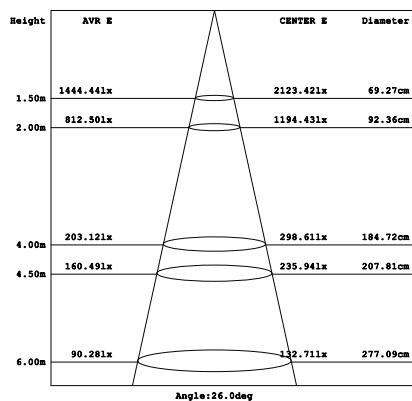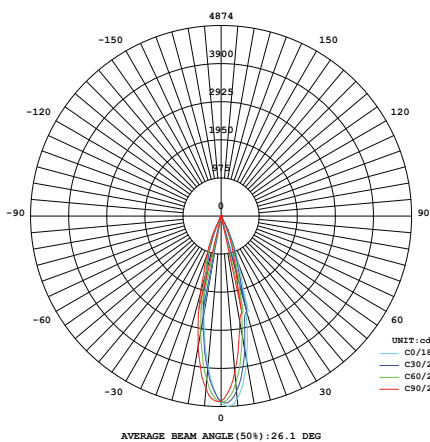

Parameter of TR-IB15 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulong
Lid cover the connector box
- Mount the rails on the fixed head

 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs

100mm x 175mm x 175mm

18 pcs

530mm x 350mm x 310mm