

TR-IB20

White
 Black
 Grey




2700K 3000K 3500K 4000K 5000K 6500K

>30,000
Hours

220-240
VAC

RoHS

CE




Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-IB20	20W	CITIZEN (Japan)	28°	3000K	>80	1785lm
					>90	1580lm
				4000K	>80	1915lm
					>90	1655lm
				5000K	>80	1915lm
					>90	1655lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure


ISOLUX DIAGRAM

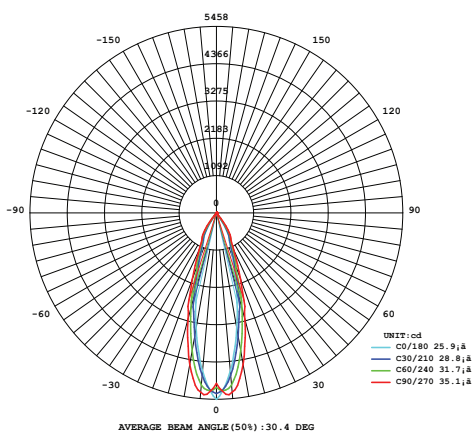

Height	AVR E	CENTER E	Diameter
1.50m	1783.60lx	2425.56lx	69.05cm
2.00m	1003.28lx	1364.38lx	92.07cm
4.00m	250.82lx	341.09lx	184.14cm
6.00m	111.48lx	151.60lx	276.20cm
10.00m	40.13lx	54.58lx	460.34cm

UNIT: cd
 C0/180 25.9;ã
 C30/210 28.8;ã
 C60/240 31.7;ã
 C90/270 35.1;ã

Angle: 25.9deg

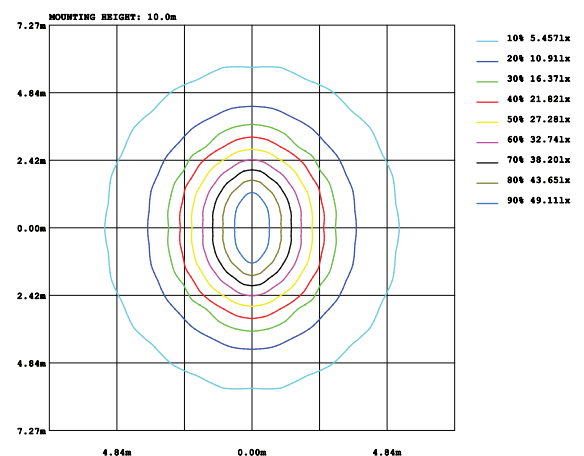

Parameter of TR-IB20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
 Wire connection point
 Bulong
 Lid cover the connector box

2. Mount the rails on the fixed head

- Always ensure that the rails are parallel to the wall
- Attach the bulong along the rails to firmly fixed

3. Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
 All radiator parts are not exposed directly to iron or steel

1 pcs
 18 pcs

100mm
 175mm
 175mm

530mm
 350mm
 310mm

VinaLED®
 Dẫn đầu về độ sáng và chất lượng