

TR-IB25

- White
- Black
- Grey




2700K 3000K 3500K 4000K 5000K 6500K

>30.000
Hours

220-240
VAC

RoHS

CE




Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-IB25	25W	CITIZEN (Japan)	28°	3000K	>80	2325lm
					>90	2080lm
				4000K	>80	2410lm
					>90	2105lm
				5000K	>80	2410lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

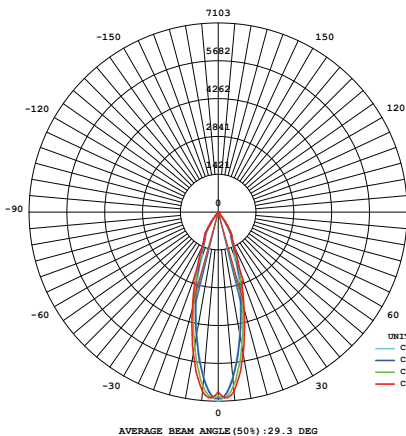

Height	AVR E	CENTER E	Diameter
1.50m	2211.68lx	3156.76lx	72.92cm
2.00m	1244.07lx	1775.68lx	97.23cm
4.00m	311.02lx	443.92lx	194.46cm
6.00m	138.23lx	197.30lx	291.69cm
10.00m	49.76lx	71.03lx	486.15cm

Angle: 27.35deg

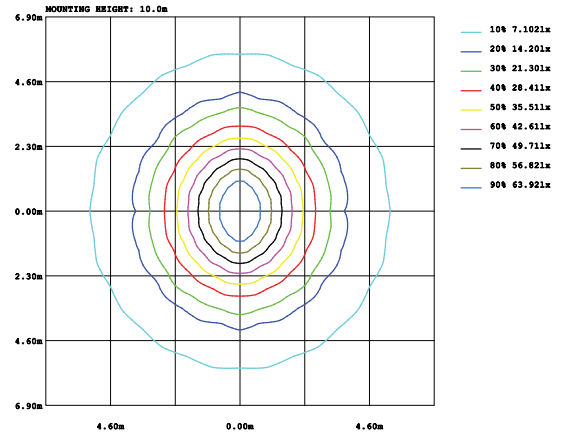

Parameter of TR-IB25 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulong
Lid cover the connector box
- Mount the rails on the fixed head

 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs

18 pcs

100mm x 175mm x 175mm

530mm x 350mm x 310mm