


TR-JB30

White






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-JB30	30W	CITIZEN (Japan)	24°	3000K	>80	2810lm
					>90	2760lm
				4000K	>80	2865lm
					>90	2800lm
				5000K	>80	2865lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

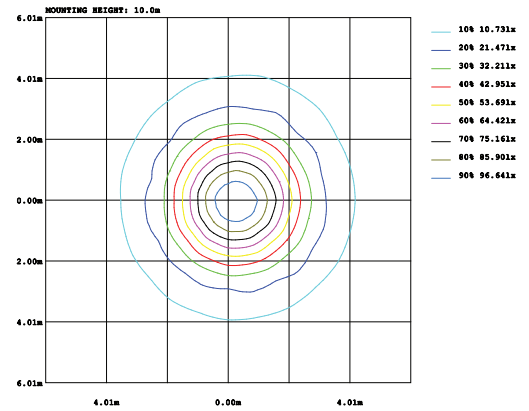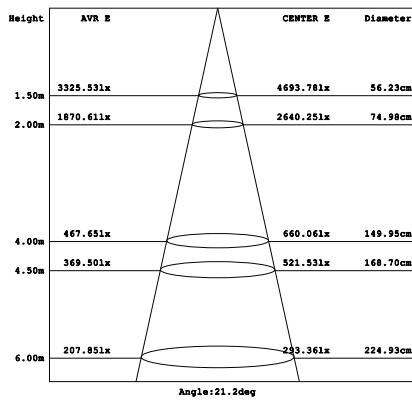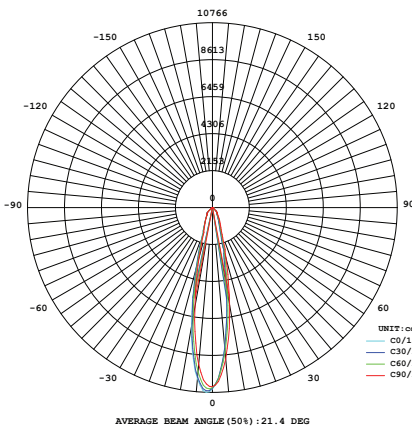

Parameter of TR-JB30 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulong
Lid cover the connector box
- Mount the rails on the fixed head

 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs

8 pcs

330mm x 130mm x 130mm

530mm x 350mm x 310mm