


TR-JW25

White



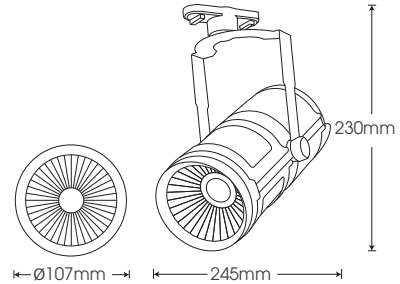


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-JW25	25W	CITIZEN (Japan)	24°	3000K	>80	2210lm
					>90	2010lm
				4000K	>80	2385lm
					>90	2090lm
				5000K	>80	2385lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

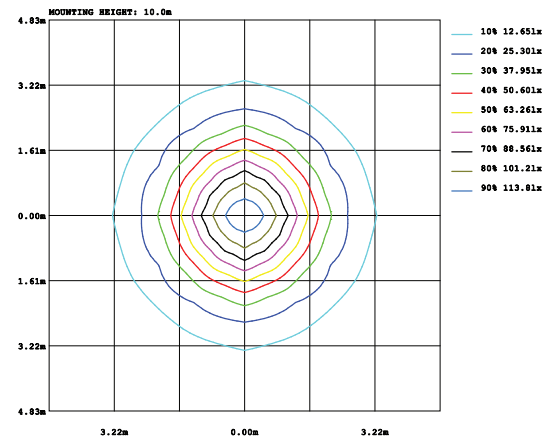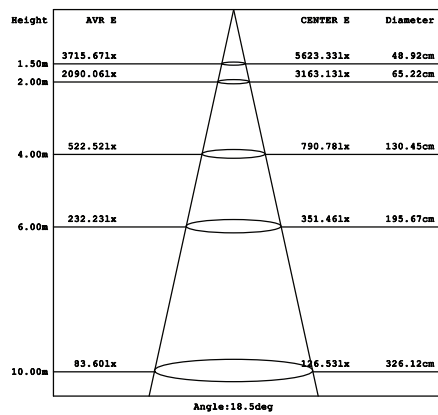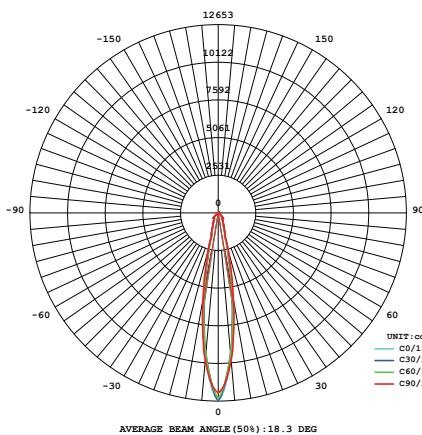

Parameter of TR-JW25 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Fixed a head on the ceiling, wire connectors with wire connection point.
 - Ceiling / wiring box
 - Wire connection point
 - Bulung
 - Lid cover the connector box
- Mount the rails on the fixed head.
 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails.

Note: Disconnect power, safety checking whole power system before construction. All radiator parts are not exposed directly to iron or steel