


TR-KW15/TR-KB15

White

Black






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-KW15/ TR-KB15	15W	CREE(USA)	Zoom 18° to 60°	3000K	>80	1210lm
				4000K	>80	1275lm
				5000K	>80	1275lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

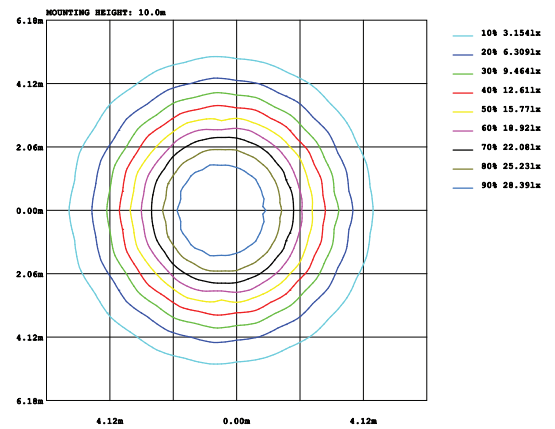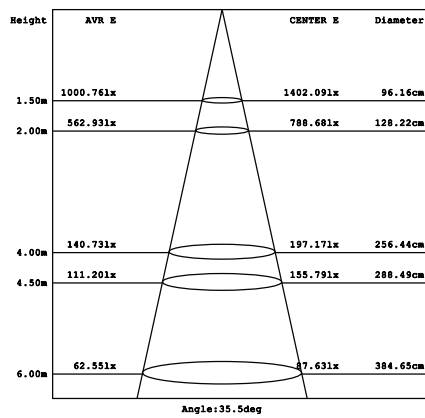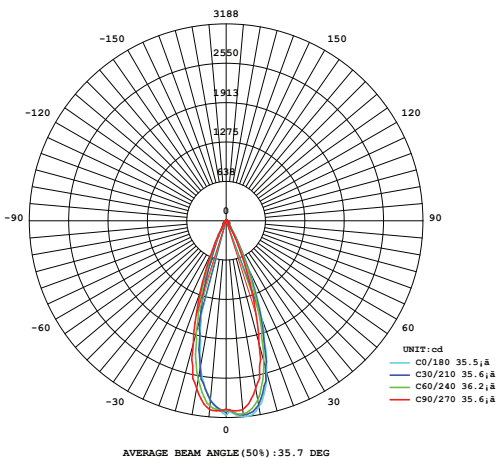

Parameter of TR-KW15/TR-KB15 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Bulung
Wire connection point
Lid cover the connector box
- Mount the rails on the fixed head

 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

zoom 18'-60'

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs
100mm
175mm
175mm
18 pcs
530mm
350mm
310mm