


TR-KW20/TR-KB20

White

Black






| Model | Power | Led source | Beam angle | CCT | CRI | Flux |
|---------------------|-------|------------|--------------------|-------|-----|--------|
| TR-KW20/ TR-KB20 | 20W | CREE(USA) | Zoom 18° to 60° | 3000K | >80 | 1605lm |
| | | | | 4000K | >80 | 1700lm |
| | | | | 5000K | >80 | 1700lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

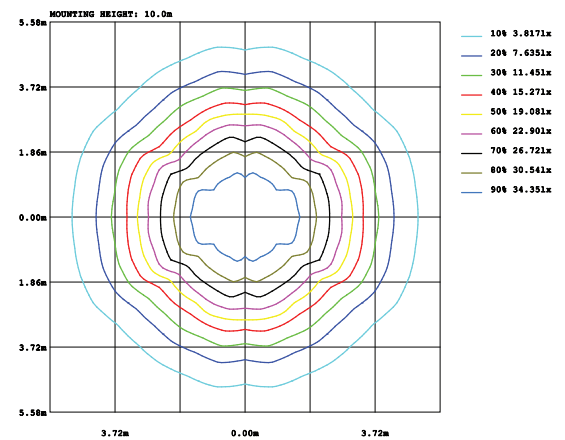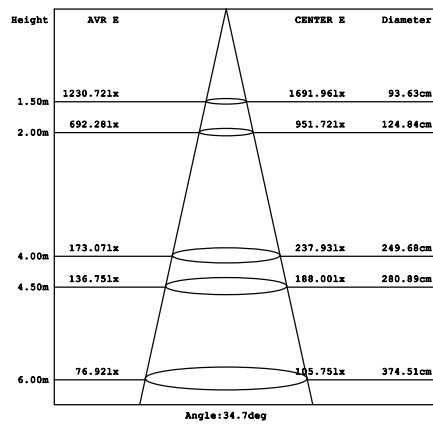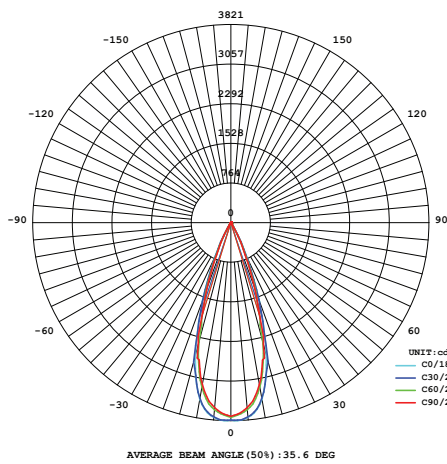

Parameter of TR-KW20/TR-KB20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Fixed a head on the ceiling, wire connectors with wire connection point**

Ceiling / wiring box
Wire connection point
Bulong
Lid cover the connector box
- Mount the rails on the fixed head**
 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails**

zoom 18°-60°

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

1 pcs

VinaLED®
Cảm biến ánh sáng và nhiệt độ