

TR-KW25/TR-KB25

2700K 3000K 3500K 4000K 5000K 5700K


>30.000
Hours

220-240
VAC

RoHS

CE

White
Black






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-KW25/ TR-KB25	25W	CREE(USA)	Zoom 18° to 60°	3000K	>80	2105lm
				4000K	>80	2125lm
				5000K	>80	2125lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

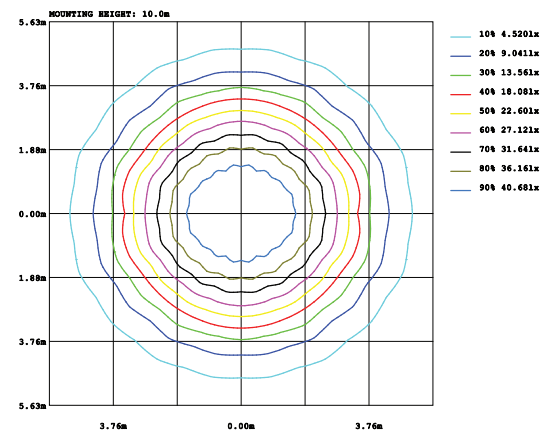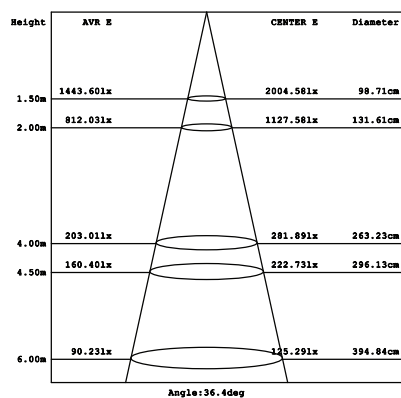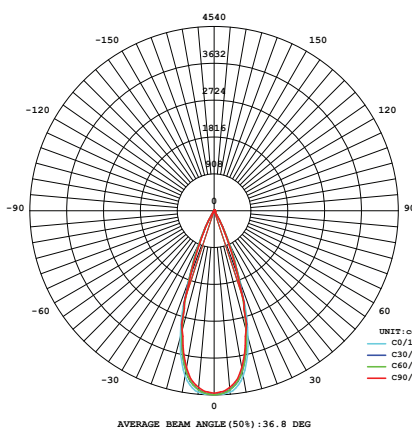

Parameter of TR-KW25/TR-KB25 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
 Wire connection point
 Bulong
 Lid cover the connector box

2. Mount the rails on the fixed head

- Always ensure that the rails are parallel to the wall
- Attach the bulong along the rails to firmly fixed

3. Put the lamp on the rails

zoom 18°-60°

Note: Disconnect power, safety checking whole power system before construction.
 All radiator parts are not exposed directly to iron or steel

1 pcs

VinaLED®
 Đèn chiếu sáng công nghiệp