


## TR-KW30/TR-KB30

White

Black






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-KW30/ TR-KB30	30W	CREE(USA)	Zoom 18° to 60°	3000K	>80	2480lm
				4000K	>80	2550lm
				5000K	>80	2550lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

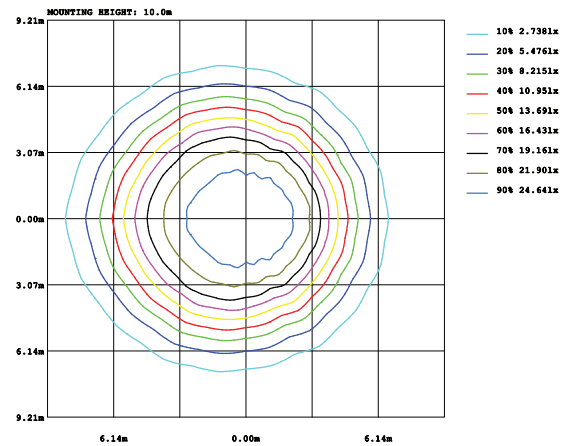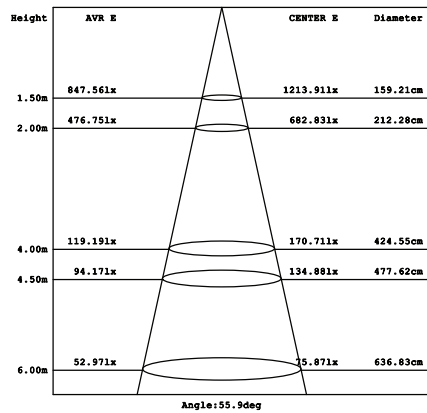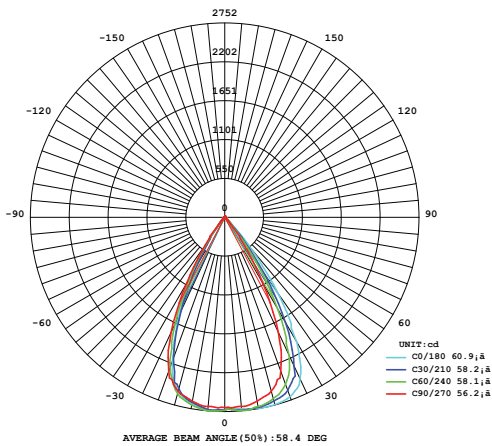

Parameter of TR-KW30/TR-KB30 | CCT 4000K

### INSTALLATION INSTRUCTIONS

### PACKING

- Fixed a head on the ceiling, wire connectors with wire connection point
- Mount the rails on the fixed head

  - Always ensure that the rails are parallel to the wall
  - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.  
All radiator parts are not exposed directly to iron or steel

1 pcs

18 pcs

100mm x 175mm x 175mm

530mm x 350mm x 310mm