


## TR-KW35 / TR-KB35

White  
Black






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-KW35/ TR-KB35	35W	CREE(USA)	Zoom 18° to 60°	3000K	>80	2880lm
				4000K	>80	3000lm
				5000K	>80	3000lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

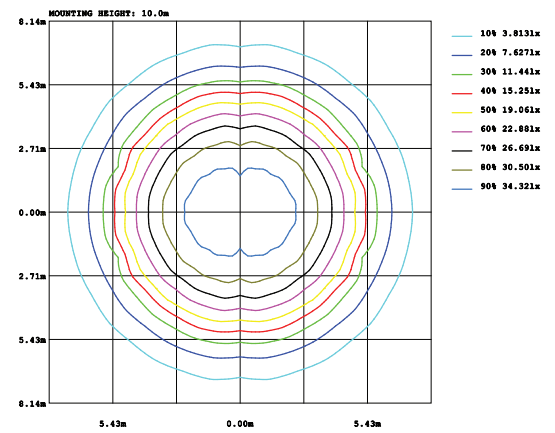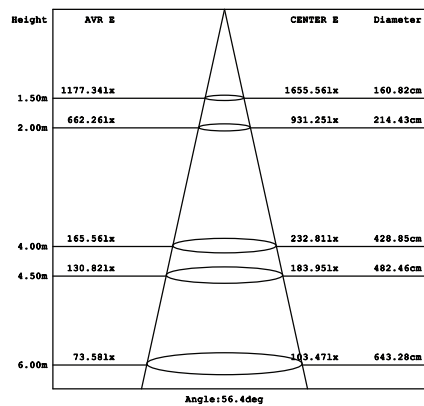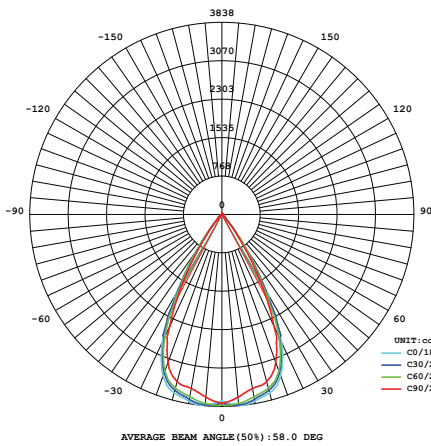

Parameter of TR-KW35/TR-KB35 | CCT 4000K

### INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box  
Bulong  
Wire connection point  
Lid cover the connector box
- Mount the rails on the fixed head

  - Always ensure that the rails are parallel to the wall
  - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

zoom 18°-60°

Note: Disconnect power, safety checking whole power system before construction.  
All radiator parts are not exposed directly to iron or steel

### PACKING

1 pcs

18 pcs

100mm  
175mm  
530mm  
350mm  
310mm

VinaLED®  
Cần đầu về độ sáng và chất lượng