



>30.000  
Hours



220-240  
VAC

RoHS

CE

## TR-LW30/TR-LB30

White  
Black




200mm

Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-LW30/ TR-LB30	30W	CREE (USA)	Zoom 18° to 60°	3000K	>80	2480lm
				4000K	>80	2550lm
				5000K	>80	2550lm

### LAMP PHOTOMETRIC REPORT


### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

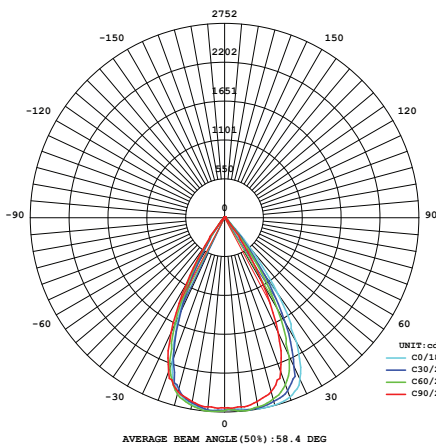

Height	AVR E	CENTER E	Diameter
1.50m	847.56lx	1213.91lx	159.21cm
2.00m	476.75lx	682.83lx	212.28cm
4.00m	119.19lx	170.71lx	424.55cm
4.50m	94.17lx	134.88lx	477.62cm
6.00m	52.97lx	75.87lx	636.83cm

Angle: 55.9deg

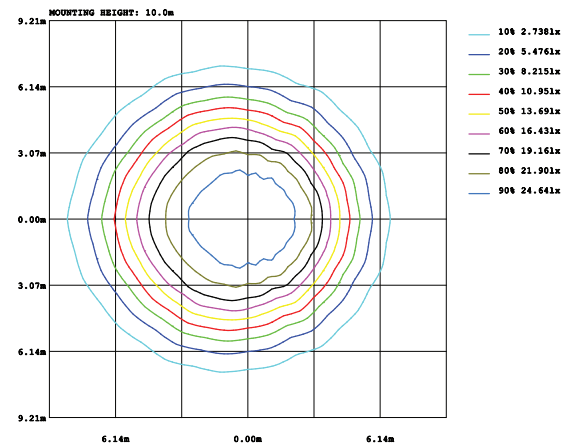

Parameter of TR-LW30/TR-LB30 | CCT 4000K

### INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box  
Wire connection point  
Bulong  
Lid cover the connector box
- Mount the rails on the fixed head

  - Always ensure that the rails are parallel to the wall
  - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails

zoom 18-60°

Note: Disconnect power, safety checking whole power system before construction.  
All radiator parts are not exposed directly to iron or steel

### PACKING

1 pcs  
18 pcs

VinaLED®  
Đ dẫn đầu về độ sáng và chất lượng