




TR-LW35/TR-LB35

- White
- Black



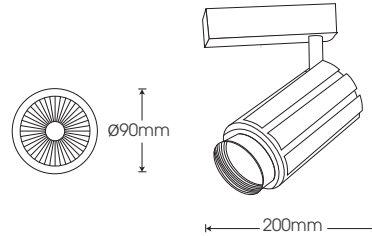


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-LW35/ TR-LB35	35W	CREE(USA)	Zoom 18° to 60°	3000K	>80	2880lm
				4000K	>80	3000lm
				5000K	>80	3000lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

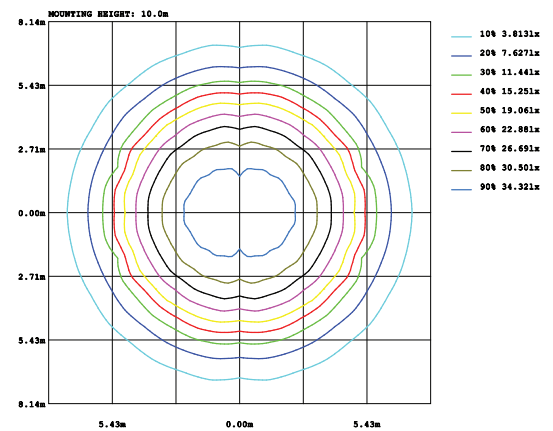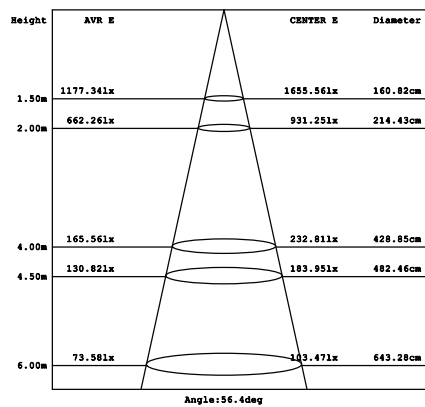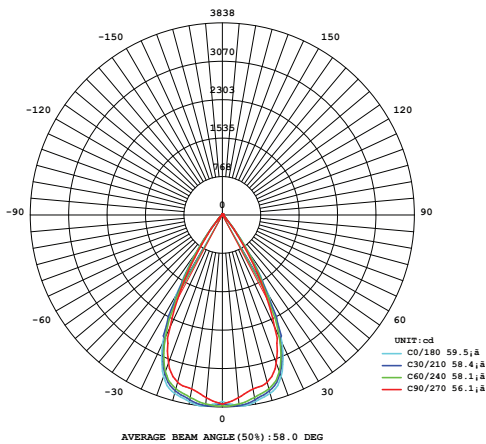

Parameter of TR-LW35/TR-LB35 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point**

Ceiling / wiring box
Wire connection point
Bulong
Lid cover the connector box
- Mount the rails on the fixed head**
 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails**

zoom 18°-60°

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs
18 pcs
VinaLED®
Đ dẫn đầu về độ sáng và chất lượng

100mm
175mm
175mm
530mm
350mm
310mm