


## WL-BB30/WL-BG30

Grey  
Black

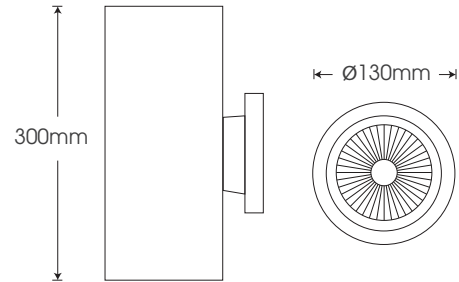


Model	Power	Led source	Beam angle	CCT	CRI	Flux
WL-BB30/ WL-BG30	30W	CREE (USA)	15°/30°/45°	3000K	>80	2x1235lm
				4000K		2x1365lm
				5000K		2x1365lm


### INSTALLATION INSTRUCTIONS

### PACKING


1. Fasten the adjustable bracket with stainless steel screw




2. Connected lamp with 220VAC power supply



3. Connect the lamp body to the bracket then fix them with stainless steel screw



**Lưu ý:** • Before wiring to the power supply, turn off electricity at fuse or circuit breaker



1 pcs

