


WL-BB50/WL-BG50

Grey
Black

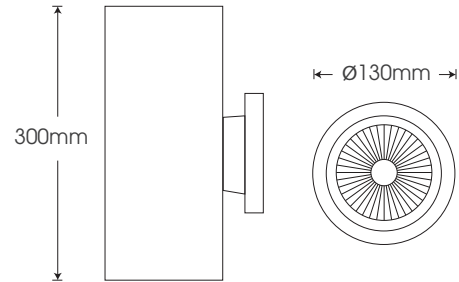


Model	Power	Led source	Beam angle	CCT	CRI	Flux
WL-BB50/ WL-BG50	50W	CREE (USA)	15°/30°/45°	3000K	>80	2x2075lm
				4000K		2x2075lm
				5000K		2x2075lm


INSTALLATION INSTRUCTIONS

PACKING


1. Fasten the adjustable bracket with stainless steel screw




2. Connected lamp with 220VAC power supply



3. Connect the lamp body to the bracket then fix them with stainless steel screw



Lưu ý: • Before wiring to the power supply, turn off electricity at fuse or circuit breaker



1 pcs

