


STP-NG90

Grey



3000K 3500K 4000K 5000K 5700K

>50.000 Hours 100-240 VAC IP66 RoHS CE



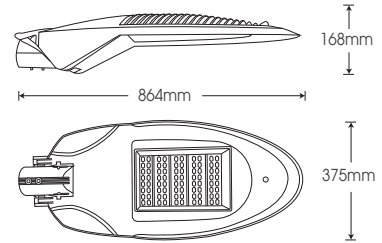


Model	Power	Led source	Beam angle	CRI	CCT	Flux
STP-NG90	90W	OSRAM	150°x 70°	>70	3000K	9910lm
					4000K	11095lm
					5000K	11095lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

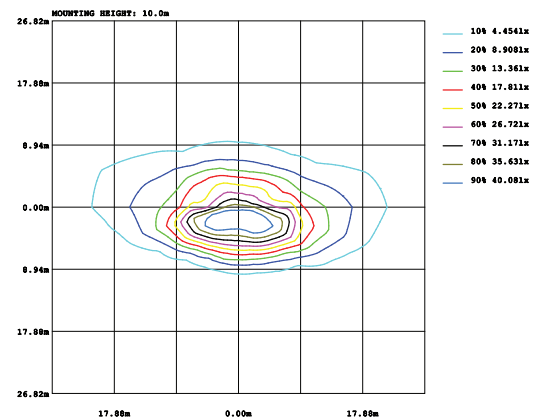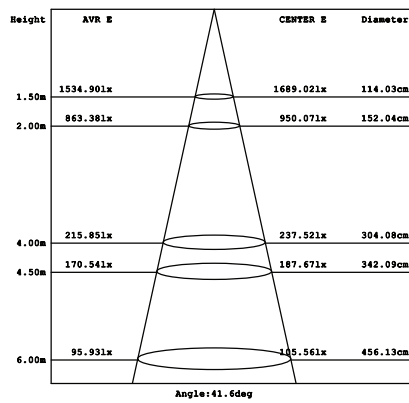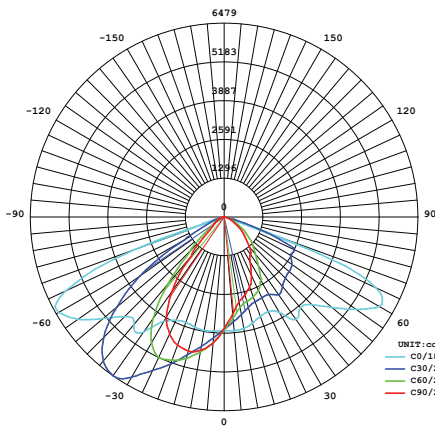

Parameter of STP-NG90 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Check: Check the safety of the lamp column according to the installation standards - Ø column < Ø lamp 5mm to 10mm.
- Wiring connected.
- Install the lamp in the column.

Note: Disconnect the power supply, check the safety of the electrical system before applying. All radiator parts are not exposed directly to iron or steel.

PACKING

1 pcs