


## TL-AW36-IP65



3000K 4000K 5000K 6500K

>30.000 Hours 85-265 VAC RoHS CE

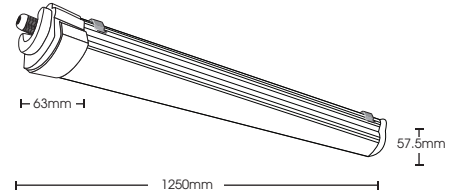




Size: L1250 x W63 x H57.5mm

Model	Power	Led source	Beam angle	CRI	CCT	Flux
TL-AW36-IP65	36W	Bridgelux (USA)	160°	>80	3000K	3200lm
					4000K	3450lm
					6500K	3450lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure


### ISOLUX DIAGRAM

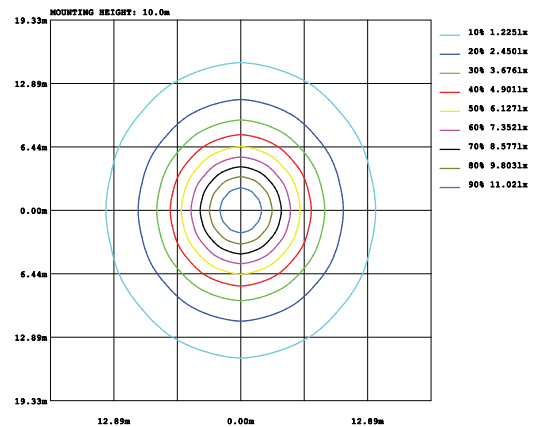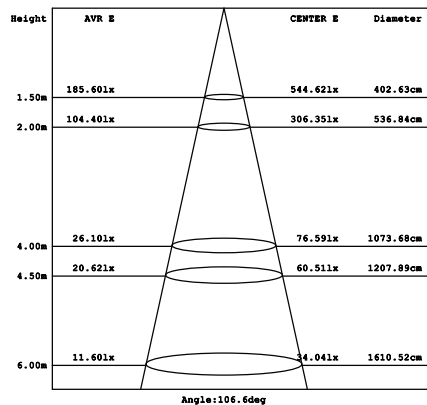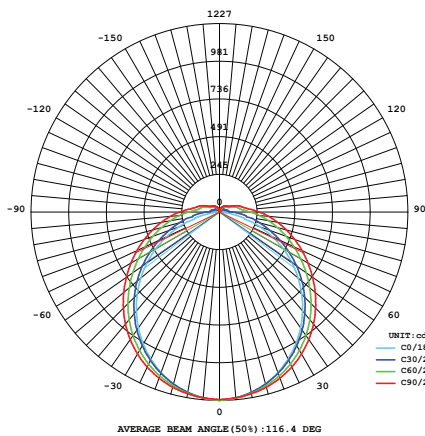


Parameter of TL-AW36-IP65 | CCT 6500K

### INSTALLATION INSTRUCTIONS

1. Drilling ceiling, screw up the ceiling
2. Fix the lamp to the ceiling

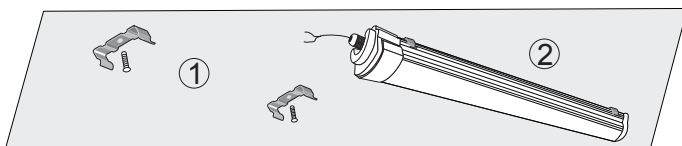

3. Connected the lamp with AC220V power

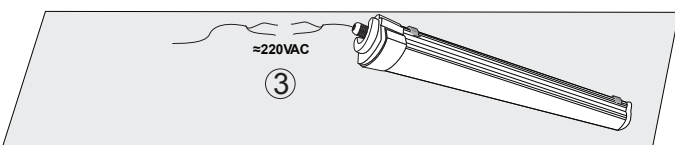

Note: Turn off the power, check the entire power system before installation.  
 All heat sinks do not come in direct contact with steel or iron

### PACKING

