


## FL-FB70

Flood light



RoHS

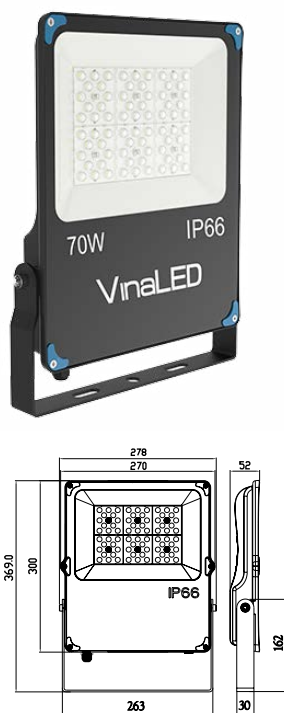

### SPECIFICATION


Model Code	FL-FB70
Power	70W
Efficiency	120lm/W (4000K)
Input Voltage	100-240VAC
Size	300x270x52mm
Body Color	Black
LED Source	Lumileds (USA)
CRI	Ra>80
Beam Angle	15°/ 20°/ 60°/ 90°/ 120°/ T2M/ T3M
CCT	2700K/ 3000K/ 4000K/ 5700K/ Color
Lume	8.000lm(W), 8.400lm(N/C)
Life time	Min 30.000h
IP	IP66
Weight	3.1kg

### PHOTOMETRIC CURVES Beam Angle 120°

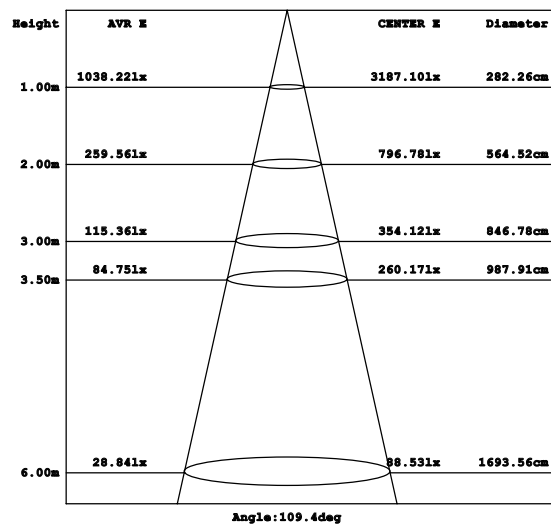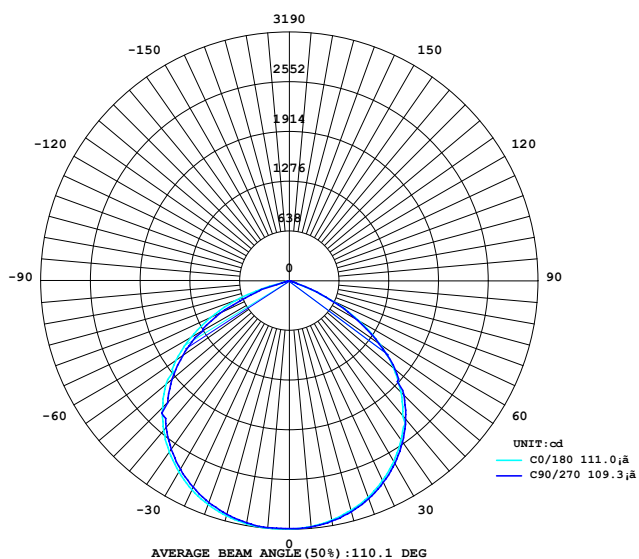


## INSTALLATION INSTRUCTIONS


**1. Remove frame out of the light**

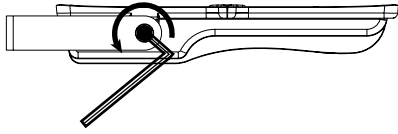



**2. Attach the bracket fixed to the position to install the lamp**



**3. Install the lights on the fixed racks**

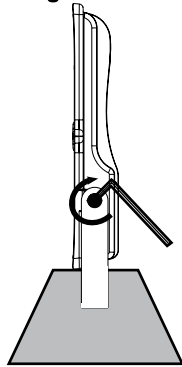

**4. connect the wires to the source 220VAC**

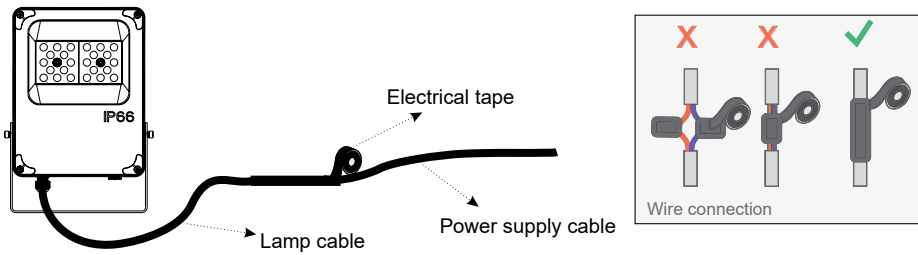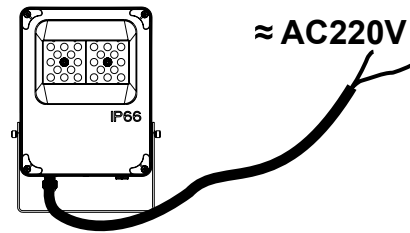

**Attention :**

1. Install by qualified electricians only .
2. Make sure that the supply voltage is disconnected before installation.
3. Make sure the voltage is suitable with the lamps ,and L/N/G connect properly.
4. Don't open the lamps without Manufacturer's Authorized

## PACKING

Power	Package size	Quantity/Cartons	Carton size
70W	L374xW294xH60mm	6	L540xW360xH310mm

