


CL-EW15/ CL-EB15


RoHS



## SPECIFICATION

Model Code	CL-EW15/ CL-EB15
Power	15W
Efficiency	100lm/W (4000K)
Input Voltage	85-265VAC
Size	Ø275x80mm
Body Color	White/ Black
LED Source	CREE (USA)
CRI	80
Beam Angle	120°
CCT	3000K/ 4000K/ 6500K
Lumen	1475lm(W), 1500lm (N/C)
Life time	Min 30.000h
IP	IP65

## PHOTOMETRIC CURVES

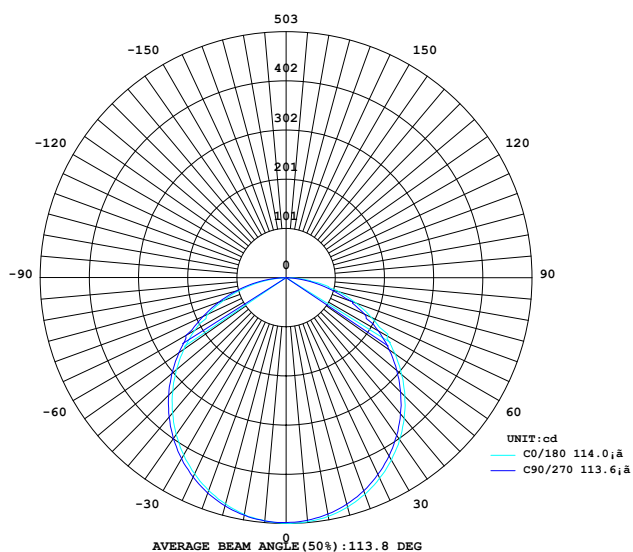


Height	AVR E	CENTER E	Diameter
1.00m	144.62lx	502.30lx	305.80cm
2.00m	36.16lx	125.57lx	611.60cm
3.00m	16.07lx	55.81lx	917.40cm
3.50m	11.81lx	41.00lx	1070.31cm
6.00m	4.02lx	13.95lx	1834.81cm


Angle: 113.6deg

## INSTALLATION INSTRUCTIONS


### 1. Remove the lamp cover

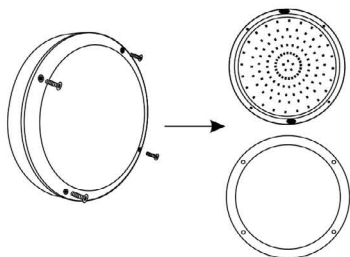


### 3. Fix screws

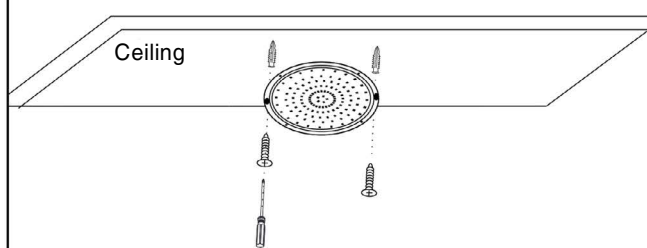

### 2. Connect the power lead to mains supply

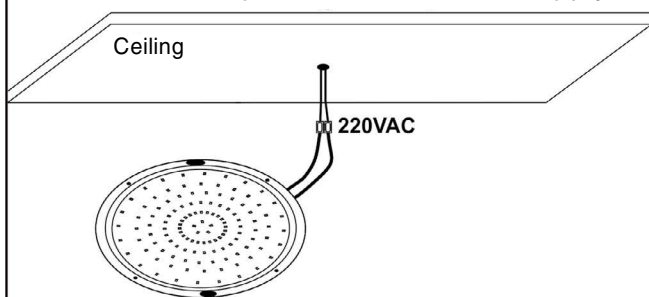

### 4. Install cover, complete installation

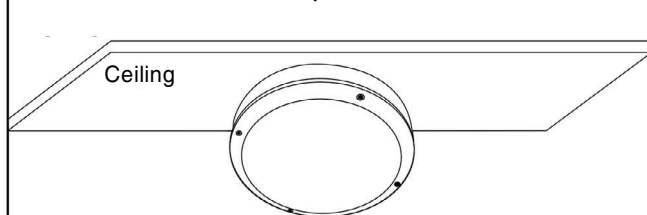

Note: - Disconnect the power supply before connecting the power  
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

## PACKING

Power	Package size	Quantity/Cartons	Carton size
15W	L280xW280xH100mm	-	-

