


UG-AS24

Inground



RoHS



SPECIFICATION


Model Code	UG-AS24
Power	24W
Efficiency	100lm/W (4000K)
Input Voltage	85-265VAC/ 24VDC(1.25A)
Size	Ø220xH95mm
Hole size	Ø207mm
Cover size	Ø207x89mm
Body Color	Silver
LED Source	CREE (USA)
CRI	80
Beam Angle	5° /10° /15° /30° /45°
CCT	2700K/ 3000K/ 4000K/ 5700K/ Red/ Green/ Blue
Lumen	2210lm(W), 2400lm(N/C)
Life time	Min 30.000h
IP	IP65

PHOTOMETRIC CURVES Beam Angle 30°

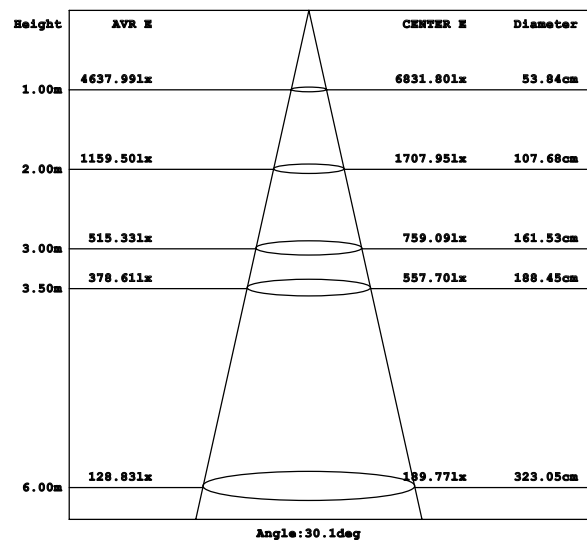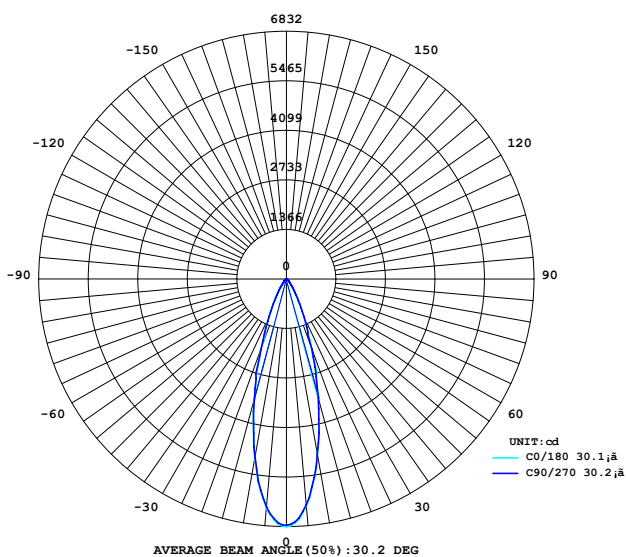


INSTALLATION INSTRUCTIONS


1. Remove the lamp body and cover

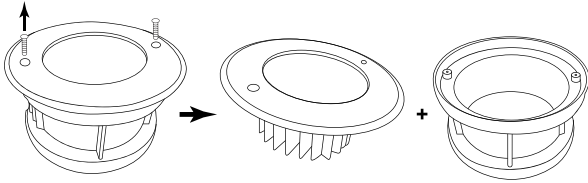


2. Drill holes, fix cover

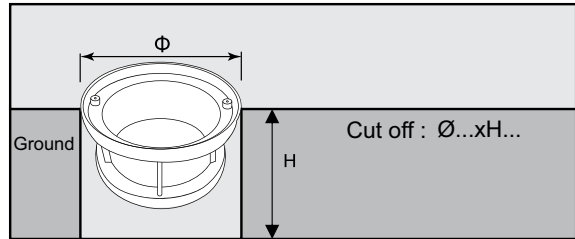




3. Connect the power lead to mains supply

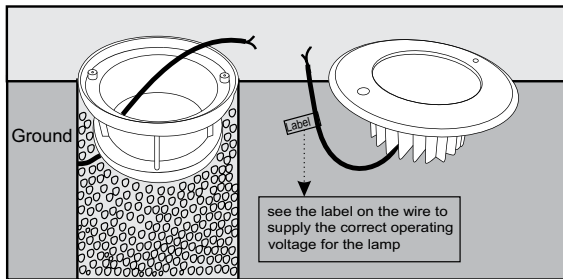

4. Fix the lamp to the cover

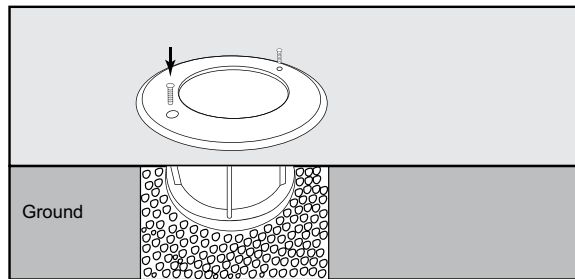

Wrap electrical tape correctly, make sure water can't get inside

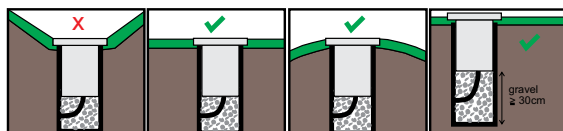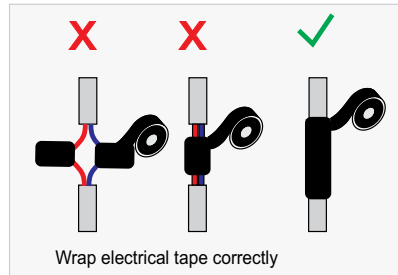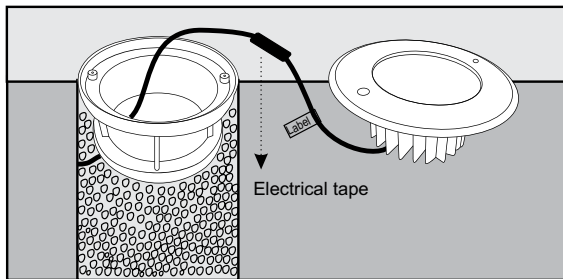

Note:

- Disconnect the power supply before connecting the power
- Housing material is Aluminum, do not install near sea water or high acidity environment.
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
24W	L210xW210xH120mm	10	L620xW470xH250mm

